

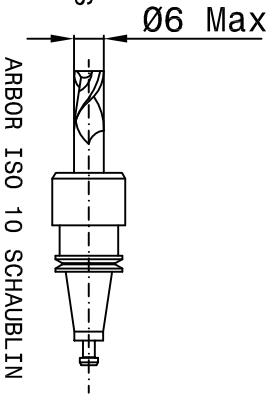


AVAILABLE TOOLHOLDERS

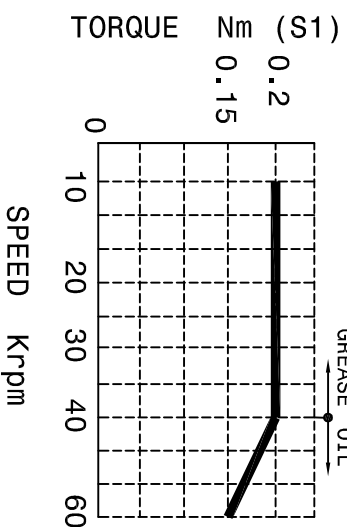

- 1-Cooling inlet (G 1/8")
 - 2-Cooling outlet (G 1/8")
 - 3-Front pressurisation 1-1.5 Bar (M6)
 - 4-Electric connection
- Motor phases - Earth - Sensor NC
- 5-Inlet air tool change (6 Bar)(G1/8")
 - 6-S1 Clamped tools
 - 7-S2-Piston under presssion ready to receive the tools
 - 8-S3-Shaft in rotation
- The electrosindle must not turn

- Asynchroneous motor 2 poles
- Max power 0.93 Kw
- Max torque 0.2 Nm
- Tension 220 V
- Max current 4.5 A
- Max frequency 667 Hz
- N°2 Ø 20 front hybrid ceramic bearings
- Bearings's Lubrication by permanent grease
- Internal cooling by liquid circuit
- Required cooling capacity 1100 Watt
- Automatic clamping tools
- Weight Kg 6.5

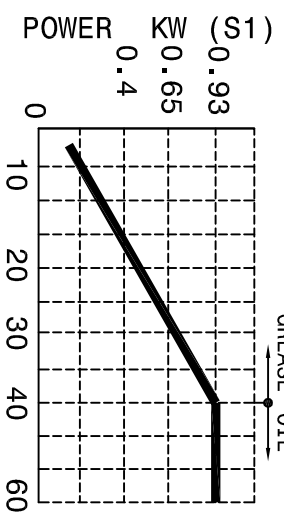

SUBJECT: PS TC-1-SP
CUSTOMER: