




AVAILABLE TOOLHOLDERS




TOOLHOLDER HSK-A/E-50/63 DIN 69893

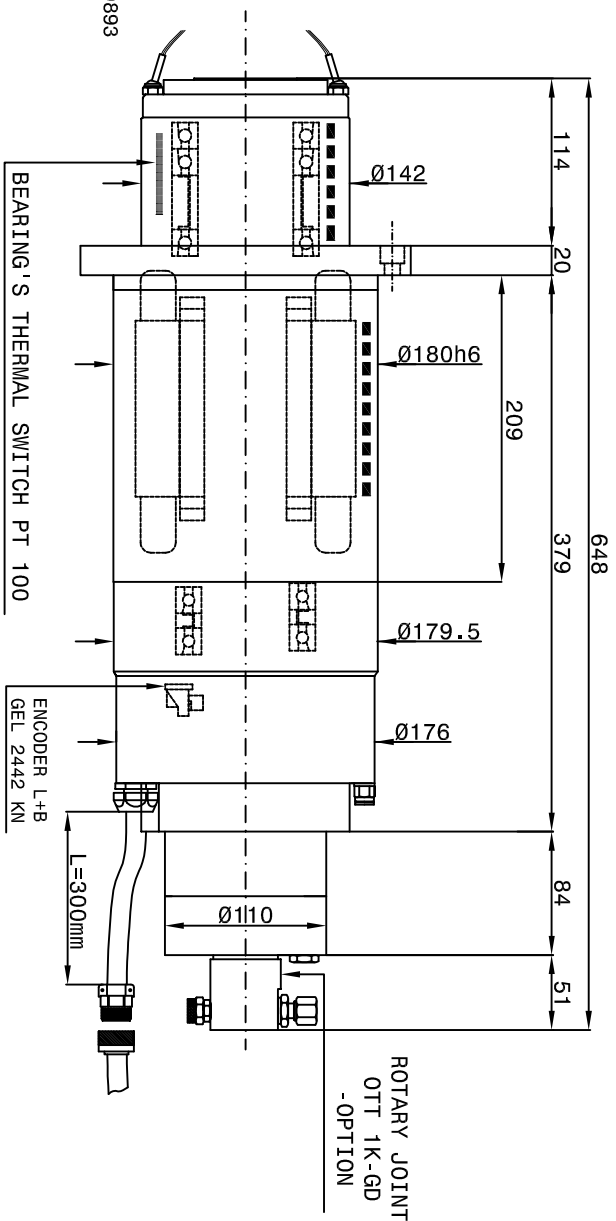


- A-Coolant inlet-outlet
- B-Double effect tool's release hydraulic cylinder inlet
- C-Electrical motor connections
- D-Sensor S1-S2-S4 cables to check the tool change operation and PT100 thermal bearing's control
- E-Front spindle and rotary joint (option) pressurisation
- F-External tool's Lubrorefrigeration
- G-Air-oil Lubrication of each bearing's inlet
- H-Outflow oil
- I-Encoder cables and HF motor thermal switches exit
- L-Tool's Lubrorefrigeration through the centre by rotary joint and arbor's air cleaning
- M-Rotary joint leakage outlet

POWER KW (S1)

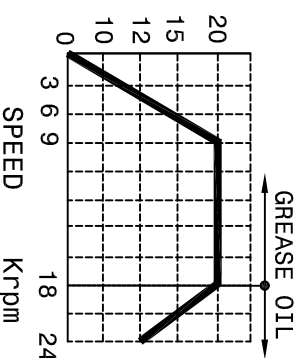

TORQUE Nm (S1)



- Asynchronous motor 4 poles
- Max power 20 Kw
- Max torque 32 Nm
- Tension 380 V
- Max current 76 A
- Max frequency 800 Hz
- N°3 Ø 65 front hybrid ceramic bearings
- Bearings's Lubrication by permanent grease or air-oil for high speeds
- Internal cooling by liquid circuit
- Automatic clamping tools
- Required cooling capacity 3500 Watt
- Weight Kg 68



SUBJECT: PS-TCV-5  
CUSTOMER: