

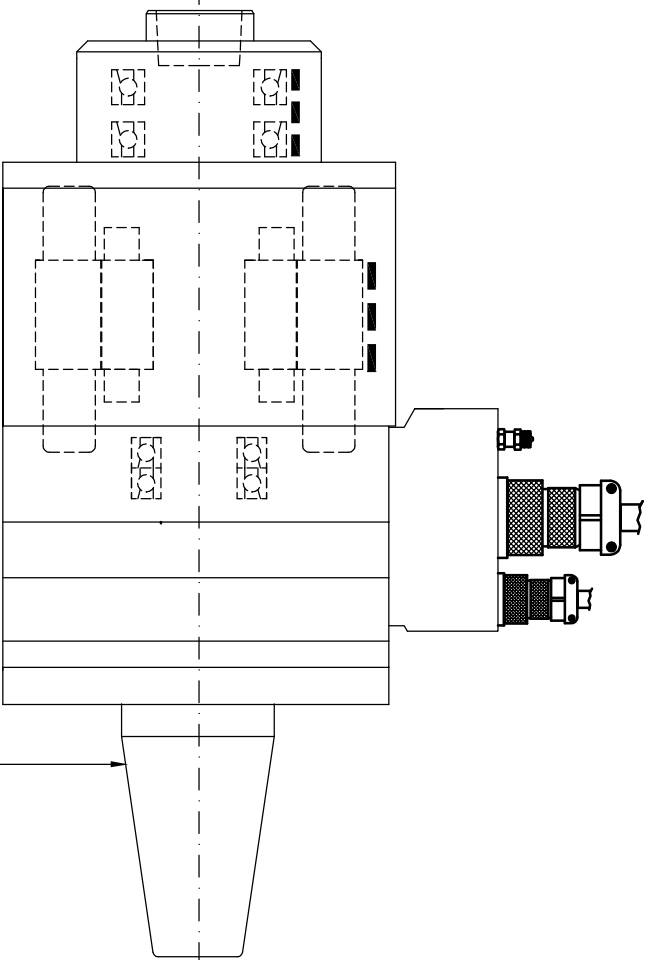



HSK E 50 DIN 69893

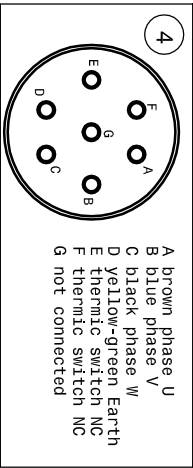



ARBOR ISO DIN 69871

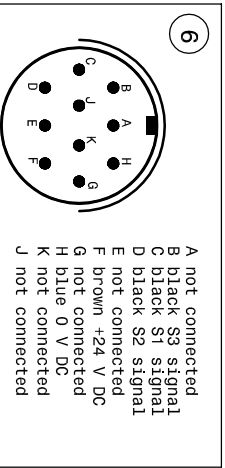

TORQUE Nm (S1)



POWER KW (S1)

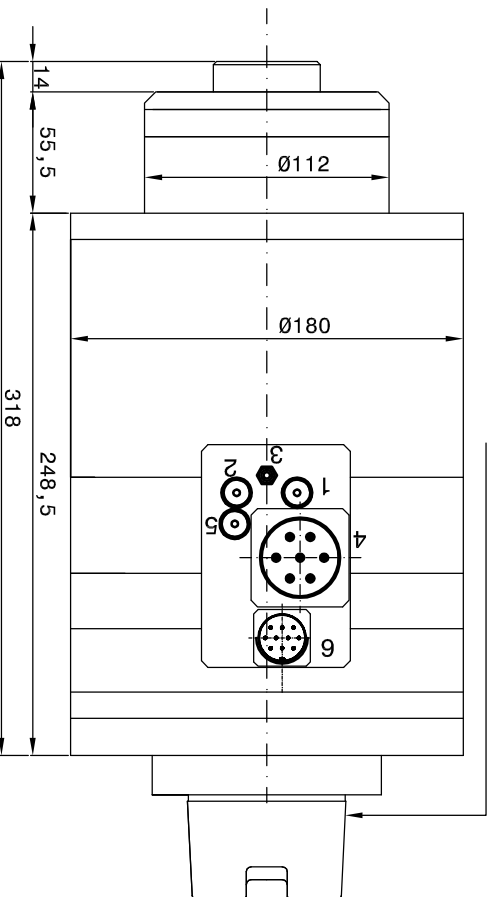

ARBOR HSK A/E DIN 69893

Motor : 4 pole

Runout taper 0.002mm

- 1-LIQUID INLET (G 1/8")
- 2-LIQUID OUTLET (G 1/8")
- 3-FRONT PRESSURIZATION (M6)
- 4-ELECTRIC CONNECTION
  - 3 MOTOR PHASE + EARTH
  - THERMIC SWITCH NC
- 5-INLET AIR TOOL-CHANGE 6 BAR
- 6-OUTLET SENSOR'S CABLES (S1-S2-S3)
  - S1-ARBOR CLAMPED
  - S2 = PISTON UNDER PRESSURE READY FOR RECEIVING TOOLS ARBOR
  - THE ELECTROSPINDLE CANNOT TURN
  - S3-SHAFT IN ROTATION

SPEED	RPM	3000	10000	12000	20000	24000
FREQUENCY	Hz	100	334	400	666	800
POWER (S1)	KW	3.5	12	12	12	10
TORQUE (S1)	Nm	11	11	9.5	5.7	4
TENSION	V	105	330	380	380	380
CURRENT	A	31	30	26	20	16



SUBJECT : A8  
CUSTOMER :

Dwg.n° 186-A8 Sheet:1/1

DATE : 02/08/07